



# U320 model

Can integrate with CellGate external cameras

Cellular  
Wiegand Entry

by cellgate

## 4 Door Controller with Optional Integrated Cameras



### Part Numbers

AAXX-LTE-ATT  
AAXX-LTE-VZN



#### Part Number:

**CB-WIM-2000**  
**1 Wiegand Expansion Board per door/gate**  
**1 Wiegand, 2 inputs, 2 relays**  
\*\*Each U320 requires a minimum of 1 CB-WIM-2000

### Key Features

- Supports up to 4 doors
- Supports up to 4 cameras  
*\*see external camera sheet*
- Integrated access control and cameras
- Verizon or AT&T LTE service, ships both SIMs  
*\*no VoIP fees required*
- Compatible with any 26-bit Wiegand reader; CellGate readers available
- Multi-Wiegand expansion capability
- Manage multiple devices, properties, and users with TrueCloud Connect™

powered by:




## U320 Unique Functionality



- Access Codes
- HID Cards
- RFID  
*cypress converter required for Transcore readers*

- Fobs/Clickers
- Virtual Keys

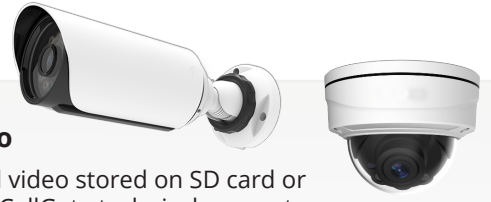

### External Camera Options

Up to 4 external cameras

#### Photos

- Taken on entry transactions and on demand
- Cloud-stored still photos

#### Recorded Video

- Pixel activated video stored on SD card or accessible via CellGate technical support
- Recording w/6-second pre-record

\*See external camera sheet for more details

TOTAL PROPERTY WIRELESS ACCESS



1.855.694.2837

cell-gate.com



# U320 model

Can integrate with CellGate external cameras

Cellular  
Wiegand Entry

by cellgate

COMING SOON

## CellGate Readers & Credentials

- Bluetooth BLE w/128kHz Prox OR Bluetooth BLE w/13.56MHz MIFARE® DESFire® EV3
- Indoor/outdoor use



Mullion



Single Gang



Single Gang with Keypad




Connecting integrations:



### ... CONNECTING ...



- Fully integrated solutions ecosystem
- The engine that manages all product hardware, data transport, CellGate app(s) and user administration
- Single login for multiple properties
- Administrative privileges for multiple user tiers

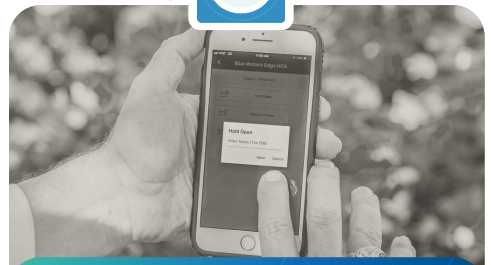

## cellgate App

- Momentary open, hold open or close commands
- Take photos (with camera option)

Apps Available on the App Store and Google Play



## Specifications

- Up to 4 Wiegand devices per system
- 8 configurable (NO/NC) relays
- 8 digital inputs for monitoring and triggering relays or cameras
- 10,000 local codes and 65,000 non-local access codes total (4-5 digit codes)
- Post mount keypad
- NEMA 3 steel electronics enclosure: 15"x12"x6"
- Operating temperature: -20°C - 55°C -4°F - 131°F
- Power (12v DC) 5 Amp transformer/power supply (battery not included)
- Notifications AC: loss of AC power via SMS message (battery required)



TOTAL PROPERTY WIRELESS ACCESS



1.855.694.2837

cell-gate.com